



RICH MOTOR COMPANY

richmotor.com

RMC Sells, Builds, & Operates
Power Generators
in Emerging markets



P 30 - 33

Data Sheet

Output Ratings

Voltage, Frequency	Prime	Standby
400V, 50HZ	30.0VA/24.0KWe	33.0KVA/26.4KWe
220/127, 60 HZ	24.0KVA/19.2KWe	26.6KVA/21.3KWe

Ratings and Performance Data

Engine Make & Model:	Perkins 1103A-33G		
Alternator Make and Model	OPTION A	OPTION B	OPTION C
	LSA42.3VS3	TAL042C	LINZ PRO 18SC/4

Control Panel	DSE6020MK2		
Base Frame	Heavy duty fabricated steel		
Circuit breaker type	3Pole MCB LS-ABB-Schneider 50A		
Frequency	50-60 Hz		
Engine Speed	1500-1800rpm		
Fuel Tank Capacity for Open type	72L		
Exhaust System	50hz	60hz	
Maximum Allowable Back Pressure:			
kPa	8 kPa	10kPa	
Exhaust Gas flow	m³/min		
	Prime	5.7	6.4
	Standby	5.8	6.6
Exhaust Gas temperature °C			
	Prime	500	520
	Standby	520	530

Prime Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standby Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3).

Standard Reference Conditions Note:

Standard reference conditions 25°C (77°F) Air Inlet Temp, 100m (328 ft) A.S.L. 30% relative humidity. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A

The above complies with requirements of Classification 3 & 4 of ISO 8528 - 12 and G2 operating limits stated in ISO 8528 - 5.

Specification

Number of cylinders	3 vertical in-line	
Bore and stroke	105 x 127 mm	4.1 x 5 in
Displacement	3.3 litres	201 in ³
Aspiration	Naturally aspirated	
Cycle	4 stroke	
Combustion system	Indirect injection	
Compression ratio	19.25:1	
Rotation	Anti-clockwise, viewed on flywheel	
Total lubricating capacity	8.3 litres	2.2 US gal
Cooling system	Water cooled	
Total coolant capacity	10.2 litres	2.7 US gal
Power Factor	0.8	
Governor	Mechanical	

Technical informaion

Air inlet

-Mounted air filter

Fuel system

Rotary type pump

Spin-on oil filter

Lubrication system

Wet steel sump with filler and dipstick

Spin-on full-flow lub oil filter

Cooling system

Thermostatically-controlled system with gear-driven circulation pump and belt-driven pusher fan

Mounted radiator, piping and guards

Electrical equipment

12 volt starter motor and 12 volt 65 amp alternator with DC output

Oil pressure and coolant temperature switches

12 volt shut-off solenoid energised to run

Flywheel and housing

1500/1800 rev/min

High inertia flywheel to SAE J620 size 10/11½

flywheel to SAE J620 size 10/11½

Mountings

Front and rear engine mounting brackets

Data Sheet
P 30 - 33



Alternator Physical Data

Specially adapted to applications

The LSA 42.3 alternator is designed to be suitable for typical generator applications, such as: backup, marine applications, rental, telecommunications, etc.

Compliant with international standards

The LSA 42.3 alternator conforms to the main international standards and regulations: - IEC 60034, NEMA MG 1.32-33, ISO 8528-3, CSA C22.2 n°100-14, UL 1446 (UL 1004 on request), marine regulations, etc.

It can be integrated into a CE marked generator.

The LSA 42.3 is designed, manufactured and marketed in an ISO 9001 and ISO 14001 environment.

Manufactured By Leroy Somer / linz	LSA ¹	TAL ²	LINZ ³
Model	LSA42.3VS3	TAL042C	LINZ PRO 18SC/4
No. of Bearings:	1	1	1
Insulation Class	H	H	H
Winding Pitch Code:	2/3 (wdg 6)	2/3 (wdg 6S)	1.43
Wires:	12	6	12
Ingress Protection Rating:	IP23	IP23	IP23
Excitation System:	SHUNT	SHUNT	SHUNT
AVR Model:	R220	R120	HVR11

2250 min-1 2250 min-1 2250 min-1

Voltage Regulation: (Steady state)	± 0.5%	± 1%	± 1%
Wave Form NEMA = TIF:	< 50	< 50	< 50
Wave Form IEC = THF:	< 2%	< 2%	< 2%
Total Harmonic content LL/LN:	< 2%	< 2%	< 2%
Radio Interference:	EN 61000-6-3, EN 61000-6-2, EN 55011 group 1 class B		
Radiant Heat: kW (Btu/min)	3371	3371	3371

Alternator Performance Data	50Hz			60 HZ
	415/240V	400/230V	380/220V	220/127V
Data Item				
Motor Starting Capability KVA	45	45	38	38
Short Circuit Capacity %	*	*	*	*
Reactances: Per Unit				
Xd	272	261		
X'd	16.9	16.2		
X''d	8.4	8.1		

Emissions

Certified against the requirements of EU 2007 (EU 97/68/EC Stage II) legislation for non-road mobile machinery, powered by constant speed engines.

Warranty

All prime equipment, limited to 2,000 running hours per year, has a one year manufacturer's warranty. Standby equipment, limited to 500 running hours per year, has a two year manufacturer's warranty. For details on warranty cover please contact Rich Motor, or visit our website: www.richmotor.com

RMC is the most trusted supplier of power and O&M services in UAE and The Middle East. We build, install, and service power solutions tailored to fit any need up to 2MW.

Fuel consumption	1500rpm	1800rpm
Standby power	8.1L/H	9.5L/H
Prime power	7.2L/H	8.6L/H
75%	5.61L/H	6.6L/H
50%	4.06L/H	4.9L/H

Built-In Fuel Tank Capacity: 72L

Recommended fuel Type and oil Type

Fuel specification: BS 2869:

Part 2 1998 Class A2 or DIN EN 590 Lubricating Oil is according to API CH4 (15W/40)

Controller Technical specs


Make And **Deep Sea PLC 6020 MK2**

Model **AUTO START AND AUTO MAINS FAILURE CONTROL MODULES**

Key

Feature:

- Efficient power save mode
- 3 phase generator sensing
- 3 phase mains (utility) sensing
- Generator/load power monitoring (kW, kV A, kV Ar, pf)
- Generator overload protection (kW)
- Generator/load current monitoring and protection
- Breaker control via fascia buttons
- Fuel and start outputs,
- 4 configurable DC outputs
- 4 configurable analogue/digital input
- 6 configurable digital inputs
- Support for 0-10 V & 4-20 mA oil pressure sensors
- Configurable staged loading outputs
- Configurable event log (50)
- LCD and LED alarm indicatio
- Comprehensive warning, electrical trip or shutdown protection upon fault conditio
- Engine speed protection
- Engine hours counter
- Engine pre-heat
- Engine run-time scheduler
- Engine idle control for starting & stopping
- Fuel pump control
- Real time cloc
- Battery voltage monitoring
- 3 engine maintenance alarms
- CAN, MPU and alternator speed sensing in one variant

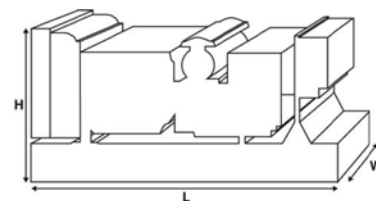

Dimensions And Weights

Length (L)	Width (W)	Height (H)	Weight(Kg)
in mm 1700	in mm 770	in mm 1250	760





RMC Sells, Builds, & Operates Power Generators in Emmerging markets

Sound Proof 30-45-60 Kva

Our compact design of the 30-45-60 Kva Normal and Super enclosures ensure optimum performance in the harshest environments. Designed and Fabricated using the latest technology and high-tech equipments, RMC Enclosures are built to Last. Doors & access panels can be Opened 180 degrees to allow easy maintenancance and service access. Extremely durable and robust, the enclosures are designed to resist corrosion and handling damage with the ability to withstand rough handling common on many construction sites. through the years RMC Specialist and Engineers have researched and developped the performance , looks and pratcticality of the enclosure. All our enclosure are weather Proof , corrosion resistant using only galvanized steel sheet, sound absorbant material with rockwool insulation covered with a layer of perforated galavanized steel sheet and a residential exhaust muffler . It offers durability and high sound suppression.

Excellent Access for Maintenance

- * 4 Access Doors for better service space
- * 2 acces doors on the front and back
- * Lube Oil and Coolant drainage valve
- * external fuel filling Gauge with Level indicator

Transportability

- *Central Lifting points ontop of the roof
- *Two Forklift pocket at the bottom of the Base frame facilitating handling

Fuel Tank

- *BuiltIn fuel tank - Extendable*
- *External bulk tank connection provision via ball valve mounted on the side of the enclosure

Optional Equipment :

- Electronic fuel level sensor
- Fuel Leak detector
- Double skin tank
- Manual/Automatic fuel filling pump

* kindly referre to one of our sales team to know more about the extra options

Sound Pressure Levels (dBA) Normal Enclosure

Generator Set Model		50Hz						60Hz					
		15m		7m		1m		15m		7m		1m	
		75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load
P30	Prime	61.8	61.8	67.6	67.8	72.1	74.7	61.6	61.9	67.6	67.9	79.8	80.2
	Standby	61.7	61.8	67.7	67.8	74.0	75.3	61.7	62.0	67.7	68.0	79.9	80.4
P45	Prime	61.2	61.3	67.2	67.3	79.4	79.5	63.7	64.0	69.7	70.0	82.6	82.8
	StandBy	61.3	61.3	67.3	67.3	79.4	79.5	63.8	64.0	69.8	70.0	82.7	82.9
P60	Prime	61.6	61.5	67.6	67.5	80.5	80.4	62.4	62.7	68.4	68.7	81.9	82.3
	Standby	61.6	61.3	67.6	67.3	80.5	80.3	62.5	62.9	68.5	68.9	82.0	82.5

Sound Pressure Levels (dBA) Super Silent Enclosure

Generator Set Model		50Hz						60Hz					
		15m		7m		1m		15m		7m		1m	
		75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load	75% Load	100% Load
P30	Prime	58.8	58.8	63.6	63.8	65.9	66.2	58.8	58.8	63.6	63.8	65.9	66.2
	Standby	58.8	58.8	63.6	63.8	65.9	66.2	58.8	58.8	63.6	63.8	65.9	66.2
P45	Prime	57.2	57.3	62.2	62.3	65.4	65.5	57.2	57.3	62.2	62.3	65.4	65.5
	StandBy	57.2	57.3	62.2	62.3	65.4	65.5	57.2	57.3	62.2	62.3	65.4	65.5
P60	Prime	57.6	57.5	62.6	62.5	65.5	65.4	57.4	57.7	62.4	62.7	65.9	65.9
	Standby	57.6	57.5	62.6	62.5	65.5	65.4	57.4	57.7	62.4	62.7	65.9	65.9

Dimensions and Weights

Genset Model	L	W	H	Weight	Fuel Tank Capacity
	in mm	in mm	in mm	in Kg	in L
Normal	2300	1000	1330	920	110L
Super Silent	2670	1100	1480	1000	121L

Images are the property of Rich Motor company FZC

The mentioned data in this sheet are subject to change without prior notice , Due to continuous research and development.



RICH MOTOR COMPANY

richmotor.com

RMC Sells, Builds, & Operates Power Generators in Emerging markets



**Contact
Us**

Rich Motor Company FZE
Hamriya Free Zone Sharjah Phase 2
P.O. Box 49353
Tel: +971-6-5269111
Fax: +971-6-5265431

E-Mail:-
Sales@richmotor.com
rncghaddar@gmail.com

richmotor.com